
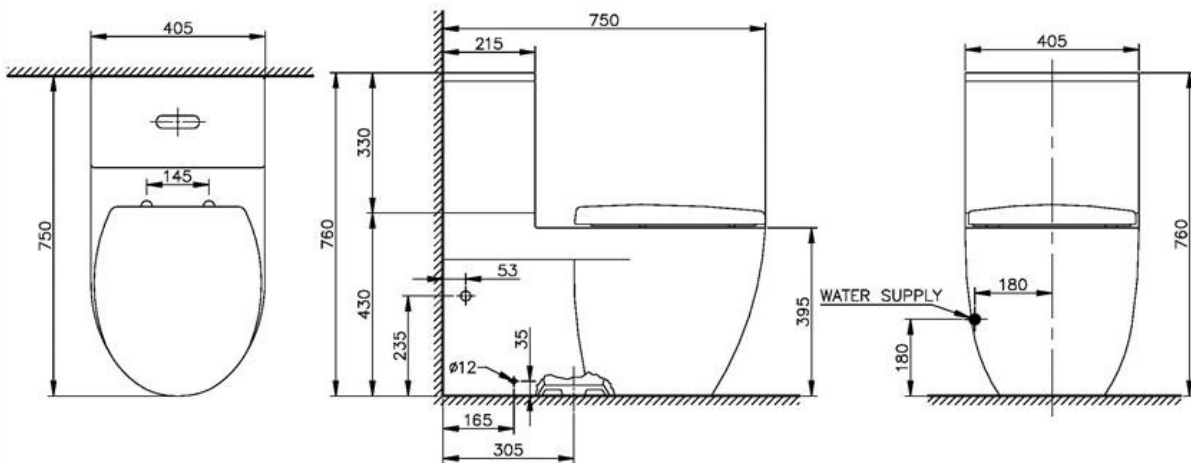


**SPECIFICATION SHEET - sanitarywares**

|                                 |   |  |
|---------------------------------|---|--|
| <b>BRAND:</b>                   | <b>nahm</b>   | <b>Product Photo:</b><br><br> |
| <b>ORIGIN:</b>                  | THAILAND  |  |
| <b>SERIES:</b>                  | NUR   |  |
| <b>PRODUCT DESCRIPTION:</b>     | <p><b>Closed-coupled round washdown toilet set, with:</b></p> <ul style="list-style-type: none"> <li>• Washdown roughing in 305mm</li> <li>• top button flush 3/6 lpf</li> <li>• soft-close seat and cover</li> <li>• min.operating pressure 1-5 bar (15-70 psi)</li> <li>• flexible supply hose 1/2" x 1/2" x 300 mm</li> <li>• angle valve 1/2" x 1/2"</li> <li>• wax seal</li> </ul> |  |
| <b>MODEL No.</b>                | NM.2730-730D  |  |
| <b>FINISH/COLOUR:</b>           | WHITE   |  |
| <b>DIMENSIONS:</b>              | 405W x 750D x 760H mm   |  |
| <b>OPTIONAL MATCHING PARTS:</b> |   |  |

**Technical Informations:**



|                  |   |
|------------------|---|
| <b>REMINDER:</b> | Pipe flushing must be done before faucets are installed. Failure to do so voids the warranty.   |
|                  | Do not use cleaners containing abrasive cleansers, ammonia, bleach, acids, waxes, alcohol, solvents or other products not recommended for chrome. |
|                  | All information is for reference only, installation shall always be based on the actual product delivered.  |